

HSL 72 S

Superior yield, cost efficient

NOMENCLATURE

HSL72P6-PC-1-xxx
xxx = power class

HIGH YIELD AND OUTSTANDING PROTECTION AGAINST DEGRADATION EFFECTS ENABLE THE 72-CELL POLY MODULE TO OFFER RELIABLE RETURNS.

Superior yield

High power output thanks to advanced four-busbar technology

Outstanding performance under real-life conditions

Double current sorting available

Long-Term durability

Verified resistance against PID effects verified by TÜV SÜD*

Withstands 5400Pa snow and 4000Pa wind loads**

Certified protection in harsh environments
(salt-mist, ammonia corrosion)

Guaranteed Quality: 12 Year Workmanship
and 25 Years Linear Performance Warranty***

Cost efficiency

Efficient Logistics: Compact Design, Efficient
Shipping, Easy Handling

* PID test according to IEC62804

** See the Hanwha Solar Installation Guide

*** Please refer to Hanwha Solar Product Warranty for details



ABOUT HANWHA SOLAR

Hanwha Solar is a brand of Hanwha Q CELLS, the world's largest solar cell manufacturer and one of the largest photovoltaic module manufacturers.



HSL 72 S

Superior yield, cost efficient

ELECTRICAL CHARACTERISTICS								
POWER CLASS			295	300	305	310	315	320
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5 W / -0 W)								
Minimum	Power at MPP ²	P _{MPP} [W]	295	300	305	310	315	320
	Short Circuit Current*	I _{SC} [A]	8.60	8.70	8.81	8.91	9.02	9.10
	Open Circuit Voltage*	V _{OC} [V]	44.6	44.8	45.0	45.1	45.3	45.6
	Current at MPP*	I _{MPP} [A]	8.11	8.20	8.29	8.36	8.45	8.52
	Voltage at MPP*	V _{MPP} [V]	36.4	36.6	36.8	37.1	37.3	37.6
	Efficiency ²	η [%]	≥15.1	≥15.3	≥15.6	≥15.8	≥16.1	≥16.3
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NOC ³								
Minimum	Power at MPP ²	P _{MPP} [W]	217	221	224	228	234	238
	Short Circuit Current*	I _{SC} [A]	6.95	7.03	7.12	7.20	7.29	7.35
	Open Circuit Voltage*	V _{OC} [V]	41.8	42.0	42.2	42.3	42.4	42.6
	Current at MPP*	I _{MPP} [A]	6.48	6.58	6.63	6.69	6.81	6.88
	Voltage at MPP*	V _{MPP} [V]	33.5	33.6	33.8	34.1	34.4	34.6
¹ 1000 W/m ² , 25 °C, spectrum AM 1.5 G		² Measurement tolerances STC ± 3 %; NOC ± 5 %	³ 800 W/m ² , NOCT, spectrum AM 1.5 G		*typical values, actual values may differ			



MECHANICAL CHARACTERISTICS	
Dimensions	1972 mm × 992 mm × 40 mm (including frame)
Weight	23 ± 0.5 kg
Front Cover	3.2 mm tempered anti-reflection glass
Backsheet	Multi-layer composite sheet
Frame	Anodised aluminium
Cell configuration	6 × 12 polycrystalline solar cells, 156 mm × 156 mm
Cell technology	4 busbar
Junction Box	Protection class IP67; 3 sets of diodes
Output Cable	4 mm ² Solar cable; (+) ≥ 1200 mm, (-) ≥ 1200 mm
Connector	Intermateable connector with H4, MC4
Packaging	25 pieces/pallet, 550 pieces/container (40 ft. HQ)

SYSTEM DESIGN	
Static load wind / snow	4000 Pa / 5400 Pa
Hail safety impact velocity	25 mm at 23 m/s
Operation temperature	-40 °C to 85 °C
NOCT	45 ± 3 °C
Maximum system voltage	1000 V (IEC)
Series fuse rating	15 A
Maximum reverse current	Series fuse rating multiplied by 1.35
Fire safety classification	Class C
Safety class	II

PERFORMANCE AT LOW IRRADIANCE	
The typical efficiency at 200 W/m ² in relation to 1000 W/m ² , (25 °C, AM 1.5) is at least 97 % of STC efficiency.	

TEMPERATURE CHARACTERISTICS	
Temperature coefficients of P	-0.41 %/°C
Temperature coefficients of V	-0.31 %/°C
Temperature coefficients of I	+0.055 %/°C

QUALIFICATIONS AND CERTIFICATES	
IEC 61215, IEC 61730, IEC 61701, IEC 62716, EN 13501, IEC62804, IEC60068-2-68, Reach compliance, Conformity to CE, SIL approved, Application Class A	
	

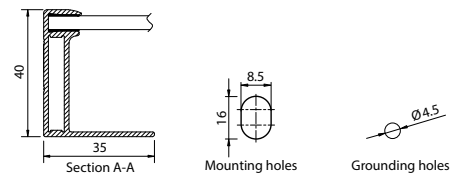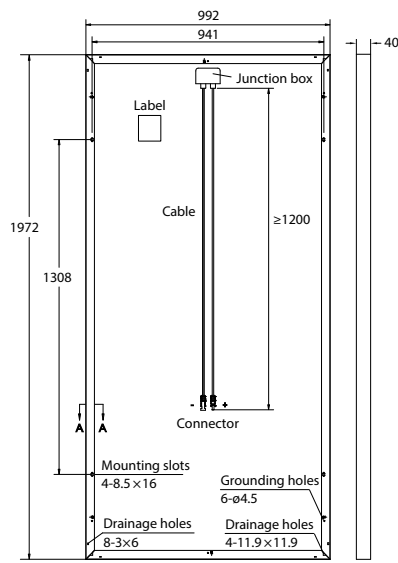

Specifications subject to technical changes © Hanwha Q CELLS Co., Ltd. HSL-72S_2016-01_Rev02_EN

NOTE: Please read the Installation Guide before using the product. Please visit our website for a complete overview of the Hanwha Solar portfolio.

CONTACT
 EMAIL info@hanwha-solar.com **WEB** www.hanwha-solar.com

